



i8-PC2
Medium Pet Cremator

The i8-PC2 is our flagship model for pet cremation, boasting a high capacity loading chamber, heavy duty front access door and cylindrical cremation chamber for increased efficiency. The i8-PC2 is also the only model in our range which is self-contained with a rear access door consisting of a mounted control panel and integrated fuel tank which provides a quick and easy on-site installation process without tricky wiring.




Industry Leading Insulation

Coretex© insulation is a specially formulated substrate containing various levels of material that ensure almost all of the heat generated within our incinerators stays inside them - increasing performance and efficiency to another level.



Rigid, Long Lasting Construction

All our incinerators are constructed from British made high quality 3-4mm mild steel plate. They are fully welded for maximum strength by our time-served coded welders. Meaning you get years of trouble-free operation. Now features stainless steel 'cool touch' cladding.



Fully Compliant Range

Each of our incinerators has been tested to exacting standards ensuring they meet all required guidelines. They are CE declared to BS E7N4 6-2:1997 (industrial thermo processing equipment – part 2). This machine can reach in excess of 850°C in the secondary chamber and also retains the fumes for the 2 seconds required.

Our entire pet cremation range has been re-engineered for 2019

Designed to process almost all kinds of pets from guinea pigs to small ponies. Front loading design provides a more streamlined and sensitive approach.

The i8-PC2 is a robust model that is well suited for upgrading your existing business. It is also ideal for start-up business who wish to have more capacity should they need it in the near future. Our models are engineered to meet strict air emission regulations without offensive smoke or odour.



- Cladding for maximum heat retention, cool touch and hygiene control
- Rapid, complete and efficient cremation cycle
- High quality refractory lining and insulation
- CE2 control panel, dual burner control, preset burn times
- Temperature monitoring and recording
- Programmable digital temperature controls for complete combustion
- Secondary burner temperature activated modulating control
- Fast pre-heat and continual high temperature performance
- Low energy consumption levels



APPROVED BY:

Department
for Environment
Food & Rural Affairs

Key Parts of our Cremation Machine

Dual HT Thermocouple

Allow independent control of primary and secondary temperatures via the control panel.

Chimney Stack

Stainless steel stack for longevity. Minimum 3m stack height required. Fitted with dispersion cap as standard.

'Cool Touch' Cladding

Hygienic, easy to clean steel cladding to reduce risk of infection and increase longevity of system.

Low NOx Burners

These are some of the cleanest, most efficient burners available today. These can be supplied as gas or oil fired.

Secondary Chamber

Retains and re-burns the exhaust gases for minimum of 2 seconds at 850°C to meet EU guidelines.

Primary Chamber

Chamber designed for maximum air flow and circulation which in turn improves efficiency and total burn time.

Safe Use Handles

Designed by us to ensure tight locking chamber with no air gaps. Easy to open and close.



How cremation works:

Cremation is a treatment process that involves the combustion of organic substances such as carcasses. Cremation and other high-temperature treatment systems are described as "thermal treatment". Cremation of materials converts it into ash, flue gas and heat. The remaining ash in most cases is just the dehydrated bones left after combustion. These are then typically cremulated (The second, lesser known process in pet cremation) to make a fine ash suitable for giving back to the owners.

Applications

Our versatile range of pet cremators are designed for a wide range of carcass types. This particular model benefits from a front loading design and very simple operation process. Ideal as a stand-alone machine.

- All types of domestic cats
- Most sized dogs
- Rabbits & Guinea Pigs
- Hamsters, Rats and Gerbils
- Micro Pigs
- Shetland Ponies
- All other medium sized cadavers

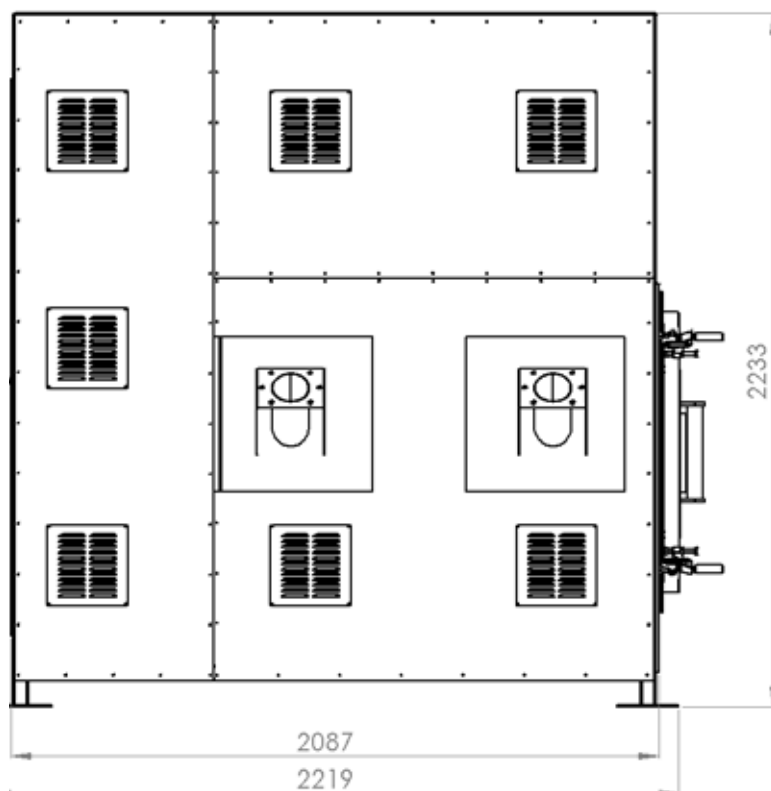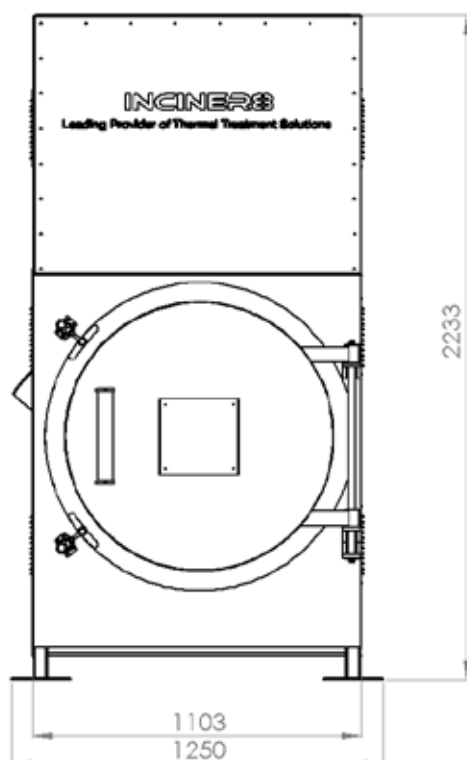

Technical Specification

** Dependent on calorific value of waste and local conditions.

Combustion Chamber Volume (m ³)	0.57m ³	Average Ash Residue (%)	3%
Metal Thickness	3-4mm	Thermostatic Device	yes
Burn Rate*	up to 50kg per hour	Shipping Weight (kg)	2500kg
Operational Temperature	850°C	Dimensions (l, w, h)	2.08m x 1.10m x 3.84m
Fuel Consumption	15 - 20 ltrs per hour	Door Size (m)	0.55ø
Gas Retention	2 seconds		

Average emissions / EU standards*

(On basic incinerators with secondary chamber)

Parameter (1/2 hr av)	Limits	Measured
Total dust	30 mg/m ³	12 mg/m ³
Sulphur dioxide	200 mg/m ³	2,4 mg/m ³
Nitrogen dioxide	400 mg/m ³	60 mg/m ³
Carbon monoxide	100 mg/m ³	78,3 mg/m ³

*The above figures are guidelines ONLY.


Actual emissions will depend on a number of factors including waste type, volume of waste, moisture content, fuel used and local environmental conditions.

All our incinerators' chambers are lined with high grade refractory concrete rated to 1600°C. Our secondary chamber technology prevents dioxins from cracking into smaller but more reactive molecules, this is known as de novo formation.

This can be especially apparent in the presence of heavy metals, which can act as a catalyst.

The prevention method can be explained as follows: system design forces the micro particulates to pass through a flame curtain, this burns harmful emissions, gas remnants are then retained in the secondary chamber, through thermal decomposition, and complex, controlled air distribution to ensure a clean odourless emission.

Site Preparation

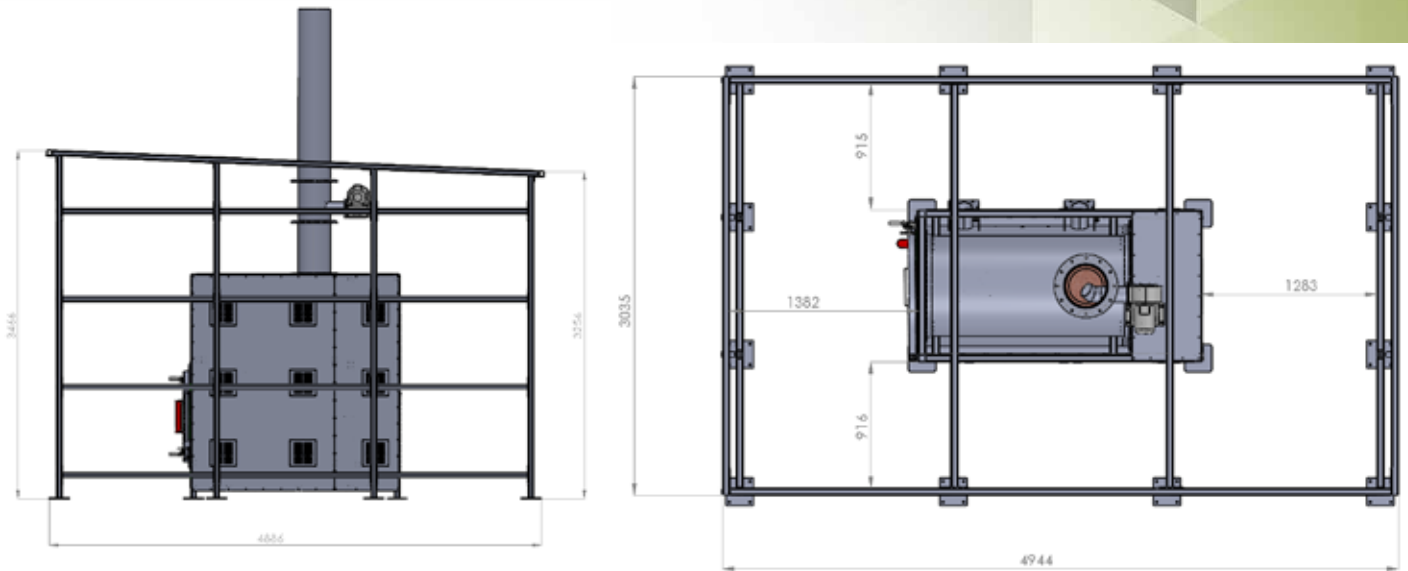

Sheltered

Ideal weather protection for equipment and operator. Our shelters are designed for easy and quick installation on a standard reinforced concrete slab.

Certain regions require some sort of shelter from adverse weather conditions or localised problems. Our products are used in diverse locations from the freezing camps of Antarctica to sweltering temperatures of Sierra Leone.



Containerised

Containerisation is the most feasible and viable option in contrast to the construction of on-site facilities and housing structures, eliminating the man power and costs involved.

The units arrive complete with electrical power generators and fuel tank with further customization available to suit all needs, regardless of local resources available. The system is available in 10ft, 20ft, and 40ft containers, depending on capacity and optional requirements.



Trailer-mounted

The trailer is rated to carry up to 2700kg , therefore there is plenty of additional space to carry extra items of equipment including generator sets, fuel and any other equipment. Chassis, framework and panels are galvanized for maximum durability.

These trailers have been built to withstand the rigours of the construction industry. The beam axle system features sealed, specialised wheel bearings and powerful auto-reverse brakes and is unequalled for strength and durability.



All containers supplied are ISO 6346 certified, so they can be used for the shipping and housing of incinerators and any other related equipment.

CE DECLARATION.



MACHINE LISTED BELOW HAS BEEN TESTED BY MANUFACTURER IN FACTORY BEFORE DISPATCH

PRODUCTION DATE: 2018
CONFORMS TO ALL SAFETY NORMS WHEN USED ACCORDINGLY
“CE DECLARATION OF CONFORMITY”
“CE DECLARATION DE CONFORMITE”
“CE DECLARACION OF CONFORMIDAD”
“CE ATTESTATO DI CONFORMITA”
“EG- KONFORM IT A TSERKLARUNG”

**INCINER8 LTD, UNIT 2, CANNING ROAD INDUSTRIAL ESTATE, CANNING ROAD,
SOUTHPORT PR9 7SN, UNITED KINGDOM**

Has declared that the machinery described:
Declares que les machines descrits:
Declaramos que la maquinaria descrita:
Dichiara che la macchina di seguito descrito:
Bestatigt daB die hierunter beschreibt Maschine:
Model (Modele; Modelo; Modello; Modell) :

CE INCINERATOR I8-PC2 C/W Eco Flam Burners

1.BS EN 746-2:1997

(industrial thermo-processing equipment – part 2. Safety requirements for combustion and handling systems)

2.Low Voltage Directive 73/23/EEC

Directive Basse Tension
Directive Baja Tension
Direttiva Sulla Bassa Tensione
Niedrige Sapnnung – Richtlinie Diretivas

3.EMC Compatibility Regulation 89/336/EEC

Directive CEM
Directiva CEM
Direttiva Compatibilita Elettromagnetica
Elektromanetische Vereinbarkeit – Richtlinie Directive EMC

4.Machinery Directive 2006/42/EC (including amendment)

Directive Securite Machines
Directiva Seguridad Maquinas
Direttiva Macchine
Maschinen – Richtlinie Directiva De Maquinario

5. (EC) No 1005/2009 on substances that deplete the ozone layer



www.inciner8.com

INCINER8 Ltd is one of the largest suppliers of cremators & incinerators in the world. Manufacturing in a factory in Southport, Merseyside and shipping out products through our dedicated sales team & Global Dealership Network.

An experienced team of researchers, designers and engineers have made INCINER8 an innovator in the cremation sector, achieving two Queens Awards and many regional business awards for our manufacturing and export capabilities. Our hand engineered machines can process municipal, medical and animal waste streams, providing the best solutions to waste problems around the world.



Speak to the Experts

Our technical sales team are always on hand to answer any questions you may have.

Call **+44 1704 884020** or email **sales@inciner8.com**